



EJ Carbide Co.,Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

MILLING

Indexable Milling Tools

Side and face milling tools code key

Cutter style	
FM	Face milling
EM	Square shoulder milling
HM	Helical end milling
SM	Side and face milling
BM	Profile milling
CM	Chamfer milling
XM	Special milling

Approach angle		
P	90°	
E	75°	
D	60°	
A	45°	
R		

Sequence number of series

Cutting diameter ØD (mm)

Cutting width of milling tools

Coupling structure and demension

A	A type of coupling	D	D type of coupling
B	B type of coupling	K	Mounting by keyway
C	C type of coupling		

SM P 03 - 160 × 16 - K40

- M P 12 - 12 L

Insert shape	
C	Diamond with 80°
D	Diamond with 55°
R	Round
S	Square
T	Regular triangle
V	Diamond with 35°
M	Diamond with 86°

Insert clearance angle	
N	0°
B	5°
C	7°
P	11°
D	15°
E	20°

		Length of cutting edge					
		Insert shape					
Diameter of IC		C	D	R	S	T	V
5.556		—	—	—	—	09	—
6.350		06	07	—	—	11	—
9.525		09	11	09	09	16	16
12.700		12	15	12	12	22	22
15.875		16	19	15	15	27	—
19.050		19	—	19	19	33	—
25.400		25	—	25	25	44	—

Cutting direction

(R: Right L: Left)

Number of teeth

B

Indexable milling tools

Side and face milling tools



EJ Carbide Co., Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

Indexable Milling Tools

MILLING

Side and face milling tools




Machining of slot

SMP01 **P** **M** **K**



K-type coupling



Specification of tools

Type		Stock	Basic dimensions(mm)						Applicable inserts	Number of teeth Z	Type of coupling	Weight (kg)
			ØD	ød	øc	H	a _p	a _e max				
SMP01 Mounting by keyway	-100×4-K27-SN12-10	△	100	27	45	12	4	25	XSEQ1202	10	K	0.2
	-125×4-K40-SN12-12	△	125	40	56	12	4	32		12	K	0.3
	-160×4-K40-SN12-16	△	160	40	67	12	4	44		16	K	0.5
	-100×5-K27-SN12-10	△	100	27	45	12	5	25	XSEQ1203	10	K	0.2
	-125×5-K40-SN12-12	△	125	40	56	12	5	32		12	K	0.3
	-160×5-K40-SN12-16	△	160	40	67	12	5	44		16	K	0.6
	-100×6-K27-SN12-10	△	100	27	45	12	6	25	XSEQ12T3	10	K	0.3
	-125×6-K40-SN12-12	△	125	40	56	12	6	32		12	K	0.4
	-160×6-K40-SN12-16	△	160	40	67	12	6	44		16	K	0.7
	-200×6-K50-SN12-18	△	200	50	71	12	6	62		18	K	1.1
	-250×6-K50-SN12-24	△	250	50	71	12	6	87		24	K	1.7
	-100×7-K27-SN12-10	△	100	27	45	12	7	25	XSEQ1204	10	K	0.3
	-125×7-K40-SN12-12	△	125	40	56	12	7	32		12	K	0.4
	-160×7-K40-SN12-16	△	160	40	67	12	7	44		16	K	0.8
	-200×7-K50-SN12-18	△	200	50	71	12	7	62		18	K	1.2
	-250×7-K50-SN12-24	△	250	50	71	12	7	87		24	K	1.9
	-100×8-K27-SN12-10	△	100	27	45	12	8	25	XSEQ12T4	10	K	0.3
	-125×8-K40-SN12-12	△	125	40	56	12	8	32		12	K	0.5
	-160×8-K40-SN12-16	△	160	40	67	12	8	44		16	K	0.9
	-200×8-K50-SN12-18	△	200	50	71	12	8	62		18	K	1.4
	-250×8-K50-SN12-24	△	250	50	71	12	8	87		24	K	2.2

▲ Stock available

△ Make-to-order

Tools code key **B118**

Grade selection guide **B15-B19**

Technical data **B168-B173**



EJ Carbide Co., Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

MILLING

Indexable Milling Tools

Side and face milling tools





Machining of slot

SMP01 **P** **M** **K**



A-type coupling

B-type coupling



Specification of tools

Type	Stock		Basic dimensions(mm)						Applicable inserts	Number of teeth Z	Type of coupling	Weight (kg)
	R	L	ØD	Ød	Øc	H	ap	ae _{max}				
SMP01 Arbor mounting	△	△	63	22	32	40	4	14	XSEQ1202	6	A	0.2
	△	△	80	22	40	40	4	18		8	A	0.4
	△	△	100	27	48	50	4	23		10	A	0.6
	△	△	63	22	32	40	5	14	XSEQ1203	6	A	0.2
	△	△	80	22	40	40	5	18		8	A	0.4
	△	△	100	27	48	50	5	23		10	A	0.7
	△	△	63	22	32	40	6	14	XSEQ12T3	6	A	0.2
	△	△	80	22	40	40	6	18		8	A	0.5
	△	△	100	27	48	50	6	23		10	A	0.7
	△	△	125	40	70	50	6	30		12	B	1.0
	△	△	160	40	70	60	6	41	XSEQ1204	16	B	1.3
	△	△	63	22	32	40	7	14		6	A	0.2
	△	△	80	22	40	40	7	18		8	A	0.5
	△	△	100	27	48	50	7	23		10	A	0.7
	△	△	125	40	70	50	7	30		12	B	1.1
	△	△	160	40	70	60	7	41	XSEQ12T4	16	B	1.4
	△	△	63	22	32	40	8	14		6	A	0.2
	△	△	80	22	40	40	8	18		8	A	0.5
	△	△	100	27	48	50	8	23		10	A	0.8
	△	△	125	40	70	50	8	30		12	B	1.1
	△	△	160	40	70	60	8	41		16	B	1.5

▲ Stock available

△ Make-to-order

B

Indexable
milling tools

Side and face milling tools



EJ Carbide Co.,Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

Indexable Milling Tools

MILLING

■ Spare parts

Diameter ØD	Edge width a _p	Screw	Wrench	
				
Ø63-Ø160	4	I91M4×3.2X	WT09S	
Ø63-Ø160	5	I91M4×4.2X		
Ø63-Ø250	6	I91M4×5.1X		
Ø63-Ø250	7	I91M4×6.1X		
Ø63-Ø250	8	I91M4×7.1X		

B
Indexable
milling tools

Side and face milling tools



EJ Carbide Co., Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

MILLING

Indexable Milling Tools


Side and face milling tools



SMP03 P M K



K-type coupling



Specification of tools

Type		Stock	Basic dimensions(mm)						Applicable inserts	Number of teeth Z	Type of coupling	Weight (kg)
			ØD	øc	ød	a _e max	a _p	H				
SMP03 Mounting by keyway	-080×8-K27-MP06-10	△	80	43	27	17	8	12	MPHT060304-DM	10	K	0.2
	-100×8-K32-MP06-14	△	100	47	32	25	8	12		14	K	0.3
	-100×10-K32-MP06-14	△	100	47	32	25	10	14		14	K	0.4
	-125×10-K40-MP06-16	△	125	55	40	34	10	14		16	K	0.6
	-125×12-K40-MP08-12	△	125	55	40	34	12	16	MPHT080305-DM	12	K	0.7
	-160×12-K40-MP08-14	△	160	62	40	47	12	16		14	K	1.3
	-160×16-K40-MP12-12	△	160	62	40	49	16	20	MPHT120408-DM	12	K	1.6
	-160×18-K40-MP12-12	△	160	62	40	49	18	24		12	K	1.9
	-160×20-K40-MP12-12	△	160	62	40	49	20	26		12	K	2.1
	-200×16-K50-MP12-14	△	200	72	50	62	16	20		14	K	2.5
	-200×18-K50-MP12-14	△	200	72	50	62	18	24		14	K	2.9
	-200×20-K50-MP12-14	△	200	72	50	62	20	26		14	K	3.3

▲Stock available △Make-to-order

Spare parts

Diameter Ød	Inserts	Screw	Wrench	
Ø80-Ø125	MP06	I60M2.5x6.5	WT07IP	--
Ø125-Ø160	MP08	I60M3x7	WT09IP	--
Ø160-Ø200	MP12	I60M5x13	--	WT20IS





EJ Carbide Co., Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

Indexable Milling Tools

MILLING


Side and face milling tools




SMP03 **P** **M** **K**




A-type coupling



B-type coupling



C-type coupling



Specification of tools

Type	Stock		Basic dimensions(mm)						Applicable inserts	Number of teeth Z	Type of coupling	Weight (kg)
	R	L	ØD	øc	ød	a _e max	a _p	H				
SMP03 Arbor mounting	△	△	-080×8-A22-MP06-10	80	45	22	21	8	40	MPHT060304-DM	A	0.4
			-100×8-B27-MP06-14	100	55	27	24	8	40		B	0.6
			-100×10-B27-MP06-14	100	55	27	24	10	40		B	0.7
			-125×10-B32-MP06-16	125	65	32	33	10	45		B	1.1
	△	△	-125×12-B32-MP08-12	125	65	32	33	12	45	MPHT080305-DM	B	1.4
			-160×12-B40-MP08-14	160	80	40	33	12	50		B	1.9
			-200×12-C40-MP08-18	200	92	40	53	12	50		C	3.2
			-125×16-B32-MP12-10	125	65	32	45	16	50	MPHT120408-DM	B	2.3
	△	△	-160×16-B40-MP12-12	160	80	40	45	16	60		B	2.3
			-160×18-B40-MP12-12	160	80	40	45	18	60		B	2.4
			-200×16-C40-MP12-14	200	92	40	53	16	50		C	3.6
	△	△	-200×18-C40-MP12-14	200	92	40	53	18	50		C	3.9
			-200×20-C40-MP12-14	200	92	40	53	20	50		C	4.2

▲Stock available △Make-to-order

Spare parts

Diameter ØD	Inserts	Screw	Wrench	
Ø80-Ø125	MP06	I60M2.5×6.5	WT07IP	--
Ø125-Ø200	MP08	I60M3×7	WT09IP	--
Ø125-Ø200	MP12	I60M5×13	--	WT20IS

Tools code key **B118**

Grade selection guide **B15-B19**

Technical data **B168-B173**



EJ Carbide Co., Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

Indexable Milling Tools

MILLING


High feed milling cutters



XMR01 P M K



S-type insert, straight shank

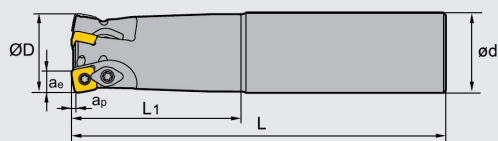

Specification of tools


Type	Stock	Basic dimensions(mm)						Number of teeth Z	Weight (kg)
		ØD	ap	ae	L1	L	ød		
XMR01 -025-G25-SD09-02	▲	25	1.4	8.8	60	140	25	2	0.5
-032-G32-SD09-03	▲	32	1.4	8.8	70	150	32	3	0.8
-035-G32-SD09-03	▲	35	1.4	8.8	70	150	32	3	0.8
-032-G32-SD12-02	▲	32	1.8	11.7	70	150	32	2	0.8
-040-G40-SD12-03	▲	40	1.8	11.7	70	150	40	3	1.3

▲Stock available △Make-to-order

XMR01 P M K



S-type insert, arbor mounting



Specification of tools

Type	Stock	Basic dimensions(mm)					Number of teeth Z	Type of coupling	Weight (kg)
		ØD	ap	ae	L	ød			
XMR01 -050-A22-SD09-04	▲	50	1.4	8.8	40	22	4	A	0.3
-063-A22-SD09-06	▲	63	1.4	8.8	40	22	6	A	0.5
-063-A27-SD09-06	▲	63	1.4	8.8	50	27	6	A	0.6
-063-A22-SD12-05	▲	63	1.8	11.7	40	22	5	A	0.5
-063-A27-SD12-05	▲	63	1.8	11.7	50	27	5	A	0.6
-080-A27-SD12-05	▲	80	1.8	11.7	50	27	5	A	0.9
-100-B32-SD12-06	▲	100	1.8	11.7	50	32	6	B	1.8

▲Stock available △Make-to-order

Tools code key [B20-B21](#) Grade selection guide [B15-B19](#) Technical data [B168-B173](#)

B Indexable milling tools High feed milling cutters



EJ Carbide Co.,Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

MILLING

Indexable Milling Tools

Spare parts

Tool type	Screw	Clamp Screw	Clamp	Wrench	
					
XMR01□□-SD09□□	I60M3.5×08TT	I60M4×8.4	WD-204	WT10IP	WT15IP
XMR01□□-SD12□□	I60M4×8.4			WT15IP	





B

Indexable
milling tools

High feed milling cutters



EJ Carbide Co., Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

Indexable Milling Tools

MILLING

High feed milling cutters



XMR01 P M K



W-type insert, straight shank



Specification of tools

Type	Stock	Basic dimensions(mm)						Number of teeth Z	Weight (kg)
		ØD	ap	ae	L1	L	ød		
XMR01 -020-G20-WP05-02-M	△	20	1.5	3.8	50	130	20	2	0.2
-020-G20-WP05-02-L	△	20	1.5	3.8	100	180	20	2	0.3
-020-G20-WP05-02-XL	△	20	1.5	3.8	130	250	20	2	0.8
-025-G25-WP06-02-M	△	25	1.5	4.35	60	140	25	2	0.4
-025-G25-WP06-02-L	△	25	1.5	4.35	120	200	25	2	0.6
-025-G25-WP06-02-XL	△	25	1.5	4.35	180	300	25	2	1.0
-032-G32-WP06-03-M	△	32	1.5	4.35	70	150	32	3	0.8
-032-G32-WP06-03-L	△	32	1.5	4.35	120	200	32	3	1.0
-032-G32-WP06-03-XL	△	32	1.5	4.35	180	300	32	3	1.6
-040-G32-WP06-03-M	△	40	1.5	4.35	50	150	32	3	0.9
-040-G32-WP06-03-L	△	40	1.5	4.35	50	250	32	3	1.5
-040-G32-WP06-03-XL	△	40	1.5	4.35	50	300	32	3	1.8
-040-G32-WP08-02-M	△	40	1.5	5.66	50	150	32	2	0.9
-040-G32-WP08-02-L	△	40	1.5	5.66	50	250	32	2	1.5
-040-G32-WP08-02-XL	△	40	1.5	5.66	50	300	32	2	1.9
-050-G32-WP09-02-M	△	50	3.0	6.8	50	150	32	2	1.9
-050-G32-WP09-02-L	△	50	3.0	6.8	50	250	32	2	2.5

▲Stock available △Make-to-order

Spare parts

Tool type	Clamp/Insert screw	Clamp	Wrench		
XMR01□□-WP05□□	I60M3.5×08TT	--	WT10P	--	
XMR01□□-WP06□□	I60M4×8.4	--	WT15P	--	
XMR01□□-WP08□□	I60M5×13	WD-208	--	WT20IT	
XMR01□□-WP09□□					

Tools code key [B20-B21](#)

Grade selection guide [B15-B19](#)

Technical data [B168-B173](#)



EJ Carbide Co.,Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com


MILLING

Indexable Milling Tools

High feed milling cutters



XMR01 **P** **M** **K**



Specification of tools

Type	Stock	Basic dimensions(mm)					Number of teeth Z	Type of coupling	Weight (kg)
		ØD	ap	ae	L	ød			
XMR01 -050-A22-WP06-04	△	50	1.5	4.35	40	22	4	A	0.4
-050-A22-WP08-03	△	50	1.5	5.66	50	22	3	A	0.4
-063-A22-WP08-04	△	63	1.5	5.66	50	22	4	A	0.7
-063-A27-WP08-04	△	63	1.5	5.66	50	27	4	A	0.7
-080-A27-WP08-05	△	80	1.5	5.66	63	27	5	A	1.5
-100-B32-WP08-06	△	100	1.5	5.66	63	32	6	B	2.2
-125-B40-WP08-07	△	125	1.5	5.66	63	40	7	B	3.5
-160-B40-WP08-08	△	160	1.5	5.66	63	40	8	B	6.0
-063-A22-WP09-03	△	63	3.0	6.8	50	22	3	A	0.7
-080-A27-WP09-04	△	80	3.0	6.8	63	27	4	A	1.4
-100-B32-WP09-05	△	100	3.0	6.8	63	32	5	B	2.1
-125-B40-WP09-06	△	125	3.0	6.8	63	40	6	B	3.7
-160-B40-WP09-07	△	160	3.0	6.8	63	40	7	B	6.3

▲Stock available △Make-to-order

Spare parts

Tool type	Clamp/Insert screw	Clamp	Wrench	
XMR01□□-WP06□□	I60M4×8.4	--	WT15S	--
XMR01□□-WP08□□	I60M5×13	WD-208	--	WT20IT
XMR01□□-WP09□□	I60M5×13	WD-208	--	





EJ Carbide Co., Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

Indexable Milling Tools


MILLING

T-slot milling tools

Kr:90°



TMP01 **K**

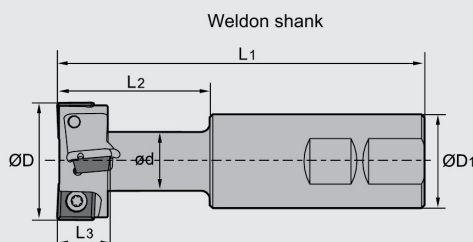

Specification of tools

Type	Stock	Basic dimensions(mm)						Number of teeth Z	刀片数	T型槽规格
		ØD	ØD1	Ød	L1	L2	L3			
TMP01 -021-XP25-MP06-01	▲	21	25	10	100	32	9	1	2	12
-025-XP25-MP06-01	▲	25	25	12	100	35	11	1	2	14
-032-XP32-MP08-02	▲	32	32	15	110	45	14	2	4	18
-040-XP32-MP12-02	▲	40	32	19	125	55	18	2	4	22
-050-XP40-MP12-02	▲	50	40	25	140	65	22	2	4	28
-060-XP50-MP12-02	▲	60	50	32	160	80	28	2	6	36

▲Stock available △Make-to-order

B
Indexable
milling tools
T-slot milling tools

Spare parts

Tool type	Screw	Wrench		
TMP01-021-XP25-MP06-01	I60M2.5×5.5	WT07IP	--	
TMP01-025-XP25-MP06-01	I60M2.5×5.5	WT07IP	--	
TMP01-032-XP32-MP08-02	I60M3×7	WT10IP	--	
TMP01-040-XP32-MP12-02	I60M5×10	--	WT20IT	
TMP01-050-XP40-MP12-02	I60M5×10	--	WT20IT	
TMP01-060-XP50-MP12-02	I60M5×10	--	WT20IT	

Caution: When installing inserts, make sure the insert nose marked with “DM” or “Δ” is pointing to the slot.

Tools code key **B20-B21**

Grade selection guide **B15-B19**

Technical data **B168-B173**



EJ Carbide Co., Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

Indexable Milling Tools

MILLING

Helical end mill

Kr:90°




Side milling



Slot milling

HMP01 **P** **K**

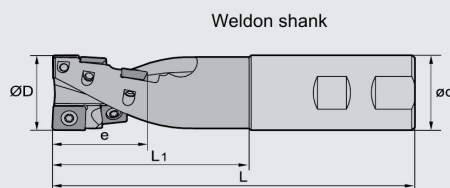

Specification of tools

Type	Stock		Basic dimensions(mm)					Number of flute Z	Number of inserts		Shank type
	R	L	ØD	ød	e	L ₁	L		APKT 150412-PM/KM	SPMT 120408-PM/KM	
HMP01 -040×55-XP40-SP12-02	△	△	40	40	55	95	175	2	1	5	Weldon shank
-050×55-XP40-SP12-04	△	△	50	40	55	95	175	4	2	10	Weldon shank

▲Stock available

△Make-to-order

B
Indexable
milling tools
Helical end mill

Spare parts

Diameter ØD	Screw	Wrench	
Ø40	I60M5×10	WT20IS	
Ø50	I60M5×13	WT20IS	

Tools code key **B20-B21**

Grade selection guide **B15-B19**

Technical data **B168-B173**



EJ Carbide Co.,Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

MILLING

Indexable Milling Tools

Helical end mill

Kr:90°



Side milling




Slot milling

HMP01 P K



JT shank/ BT shank (JT shank shown)

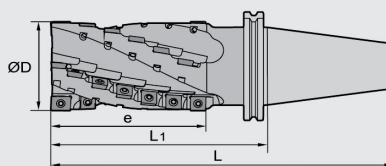

Specification of tools

Type	Stock		Basic dimensions(mm)				Number of flute Z	Number of inserts		Shank type
	R	L	ØD	e	L1	L		APKT 150412-PM/KM	SPMT 120408-PM/KM	
HMP01 -050×84-JT50-SP12-04	△	△	50	84	145	246.75	4	2	16	JT
-063×74-JT50-SP12-04	△	△	63	74	135	236.75	4	2	14	JT
-063×104-JT50-SP12-04	△	△	63	104	165	266.75	4	2	20	JT
-063×134-JT50-SP12-04	△	△	63	134	195	296.75	4	2	26	JT
-080×104-JT50-SP12-04	△	△	80	104	165	266.75	4	2	20	JT
-080×144-JT50-SP12-04	△	△	80	144	205	306.75	4	2	28	JT
-050×84-BT50-SP12-04	△	△	50	84	145	246.8	4	2	16	BT
-063×74-BT50-SP12-04	△	△	63	74	135	236.8	4	2	14	BT
-063×104-BT50-SP12-04	△	△	63	104	165	266.8	4	2	20	BT
-063×134-BT50-SP12-04	△	△	63	134	195	296.8	4	2	26	BT
-080×104-BT50-SP12-04	△	△	80	104	165	266.8	4	2	20	BT
-080×144-BT50-SP12-04	△	△	80	144	205	306.8	4	2	28	BT

▲Stock available

△Make-to-order

Spare parts

Diameter ØD	Screw	Wrench	
Ø50	I60M5×13	WT20IS	
Ø63	I60M5×13	WT20IS	
Ø80	I60M5×13	WT20IS	



EJ Carbide Co., Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

Indexable Milling Tools

MILLING

Helical end mills with interchangeable heads


Kr:90°



HMP01 EC P K



JT shank/ BT shank (JT shank shown)

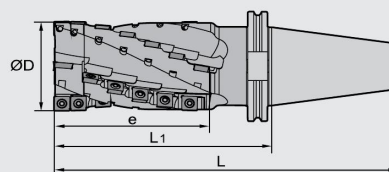

Specification of tools

Type		Stock		Basic dimensions(mm)				Number of flute Z	Number of inserts		Shank type
		R	L	ØD	e	L ₁	L		APKT 150412-PM/KM	SPMT 120408-PM/KM	
HMP01	-050×84EC-JT50-SP12-04	△	△	50	84	145	246.75	4	2	16	JT
	-063×74EC-JT50-SP12-04	△	△	63	74	135	236.75	4	2	14	JT
	-063×104EC-JT50-SP12-04	△	△	63	104	165	266.75	4	2	20	JT
	-063×134EC-JT50-SP12-04	△	△	63	134	195	296.75	4	2	26	JT
	-080×104EC-JT50-SP12-04	△	△	80	104	165	266.75	4	2	20	JT
	-080×144EC-JT50-SP12-04	△	△	80	144	205	306.75	4	2	28	JT
	-050×84EC-BT50-SP12-04	△	△	50	84	145	246.8	4	2	16	BT
	-063×74EC-BT50-SP12-04	△	△	63	74	135	236.8	4	2	14	BT
	-063×104EC-BT50-SP12-04	△	△	63	104	165	266.8	4	2	20	BT
	-063×134EC-BT50-SP12-04	△	△	63	134	195	296.8	4	2	26	BT
	-080×104EC-BT50-SP12-04	△	△	80	104	165	266.8	4	2	20	BT
	-080×144EC-BT50-SP12-04	△	△	80	144	205	306.8	4	2	28	BT

▲Stock available

△Make-to-order

Spare parts

Diameter ØD	Insert screw	Screw of interchangeable head	Wrench of insert screw	Wrench of interchangeable head	Interchangeable head	
Ø50	I60M5×13	M10×50	WT20IS	WH80L	050EC	
Ø63	I60M5×13	M10×50	WT20IS	WH80L	063EC	
Ø80	I60M5×13	M12×55	WT20IS	WH100L	080EC	

Tools code key **B20-B21**

Grade selection guide **B15-B19**

Technical data **B168-B173**



EJ Carbide Co.,Ltd

Tel: 86 0731 22995411

Email: judy@ejcarbide.com

Web: www.ejcarbide.com

MILLING

Indexable Milling Tools

Chamfer milling tools

Kr:30°




Chamfering

Face milling

Hole stomata chamfer

CMZ01 P M K

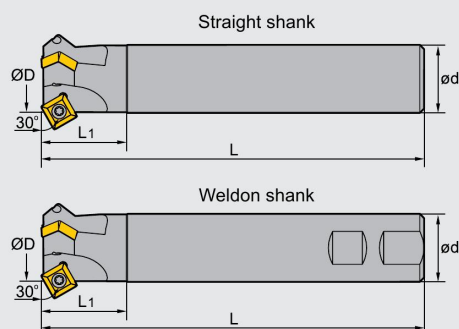

Specification of tools

Type		Stock	Basic dimensions(mm)				Number of teeth Z	Weight (kg)
			ØD	ød	L	L1		
CMZ01 Straight shank	-012-G20-SP12-01	△	12	20	100	40	1	0.2
	-025-G25-SP12-02	△	25	25	120	40	2	0.8
	-032-G32-SP12-03	△	32	32	180	40	3	1.1
Weldon shank	-012-XP20-SP12-01	△	12	20	100	40	1	0.2
	-025-XP25-SP12-02	△	25	25	120	40	2	0.6
	-032-XP32-SP12-03	△	32	32	180	40	3	1.0

▲Stock available

△Make-to-order

Spare parts

Diameter ØD	Screw	Wrench
Ø12-Ø32	I43M5×11	WT20IS





EJ Carbide Co.,Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

Indexable Milling Tools

MILLING

Chamfer milling tools

Kr:45°




Chamfering

Face milling

Hole stomata chamfer

CMA01 P M K

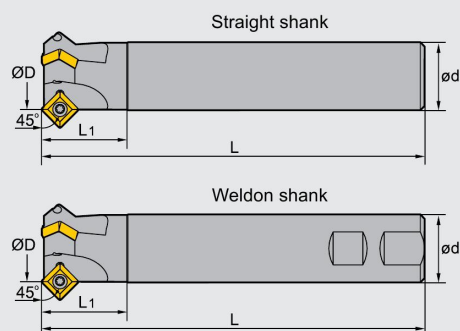

Specification of tools

Type		Stock	Basic dimensions(mm)				Number of teeth Z	Weight (kg)
			ØD	ød	L	L1		
CMA01 Straight shank	-012-G20-SP12-01	▲	12	20	100	40	1	0.2
	-025-G25-SP12-02	▲	25	25	120	40	2	0.8
	-032-G32-SP12-03	▲	32	32	180	40	3	1.1
Weldon shank	-012-XP20-SP12-01	▲	12	20	100	40	1	0.2
	-025-XP25-SP12-02	▲	25	25	120	40	2	0.6
	-032-XP32-SP12-03	▲	32	32	180	40	3	1.0

▲Stock available

△Make-to-order

Spare parts

Diameter ØD	Screw	Wrench
Ø12-Ø32	I43M5×11	WT20IS



Tools code key [B20-B21](#)

Grade selection guide [B15-B19](#)

Technical data [B168-B173](#)



EJ Carbide Co.,Ltd

Tel: 86 0731 22995411 Email: judy@ejcarbide.com

Web: www.ejcarbide.com

MILLING

Indexable Milling Tools

Chamfer milling tools

Kr:60°




Chamfering

Face milling

Hole stomata chamfer

CMD01 P M K

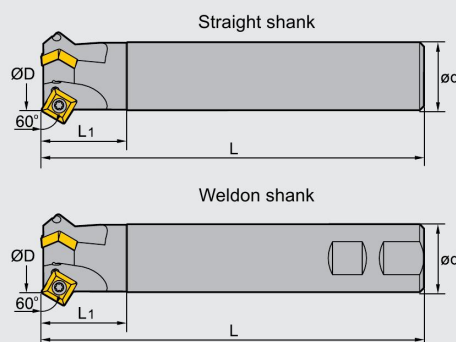

Specification of tools

Type		Stock	Basic dimensions(mm)				Number of teeth Z	Weight (kg)
			ØD	ød	L	L1		
CMD01 Straight shank	-012-G20-SP12-01	▲	12	20	100	40	1	0.2
	-025-G25-SP12-02	▲	25	25	120	40	2	0.8
	-036-G32-SP12-03	▲	36	32	180	40	3	1.0
Weldon shank	-012-XP20-SP12-01	▲	12	20	100	40	1	0.2
	-025-XP25-SP12-02	▲	25	25	120	40	2	0.6
	-036-XP32-SP12-03	▲	36	32	180	40	3	1.0

▲Stock available

△Make-to-order

Spare parts

Diameter ØD	Screw	Wrench
Ø12-Ø32	I43M5×11	WT20IS

